



MONOLEVER SWITCH

FEATURES


1. You can smoothly and swiftly handle the lever in four directions – upward, rightward, downward, and leftward.
2. Three alternatives of movement are attainable in each direction:
Go-on, auto-return, and blockade-enforcing.
3. You are free, as you like, to operate in four, three, or two directions with the switch.
4. Rubber bushing is water-proof, oil-resistant, and dust-preventive.




BR-1



BR-2




BR-3



RATINGS

AC	Rated Voltage		110V	220V	440V
	Rated Current		5A	3A	1A
	Breaking Current Capacity		50A	30A	10A
DC	Resistance load	Rated Voltage	110V	220V	600V
		Rated Current	2.2A	1.1A	0.4A
		Breaking Current	2.42A	1.21A	0.44A
	Inductive load	Rated Current	1.2A	0.45A	0.2A
Breaking Current		1.32A	0.5A	0.22A	
Continuous passable current			10A		
Insulation Resistance			Over 100M Ω		
Dielectric Strength			2,200VAC for duration of 1 min.		
Service Life	Mechanically		500,000 operations min.		
	Electrically		500,000 operations min.		
Ambient temperature			-20°C ~ +50°C		

MODEL DESIGNATIONS





NOTE:


When you place order, please kindly designate clockwise the movement way and type of contact blocks fitted.

Designation	Signal	Description
1. Type	TMR TMS	Round Type Square Type
2. Mounting Hole	30	φ30m/m only.
3. No. of Contact Blocks Fitted	1 ~ 4	1 ~ 4
4. Movement way	1 2 0	Go-on Auto-Return Blockade-enforcing
5. Type of Contact Blocks Fitted	00	None
	10	1a (1NO)
	20	2a (2NO)
	01	1b (1NC)
	02	2b (2NC)
	11	1a1b (1NO-1NC)

TMR-302

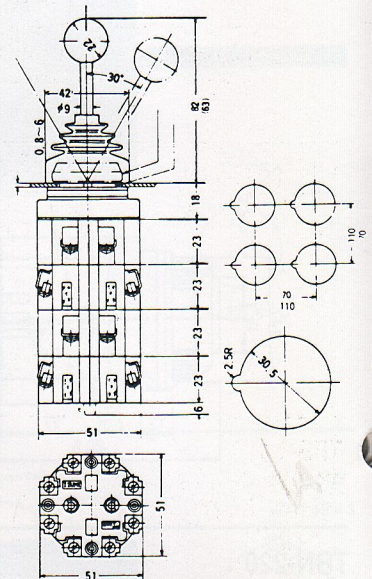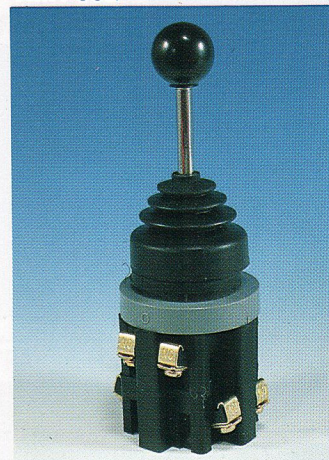

TMRS-304

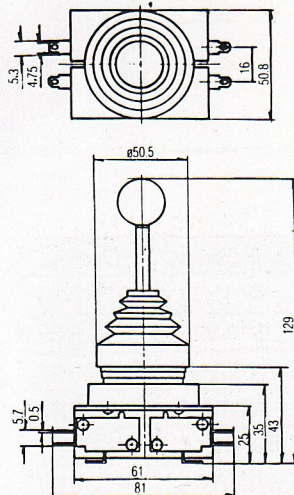

TMS-304

